



BYD Microelectronics Co., Ltd.

BSX2-500ICV3HA

Current Sensors

Description

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

Features

- ◆ Hall effect measuring principle
- ◆ Galvanic isolation between primary and secondary circuit
- ◆ Low power consumption
- ◆ Extended measuring range
- ◆ Insulated plastic case recognized according to UL 94-V0



$I_{PN} = 500A$

Advantages

- ◆ Excellent linearity
- ◆ High accuracy
- ◆ Low temperature drift
- ◆ Wide frequency bandwidth
- ◆ Rapid response time
- ◆ No insertion losses
- ◆ High immunity against external interference
- ◆ Excellent performance and price

Industrial applications

- ◆ AC variable speed drives
- ◆ Battery supplied applications
- ◆ Uninterruptible Power Supplies (UPS)
- ◆ Power supplies for welding applications
- ◆ Static converters for DC motor drives
- ◆ Switched-Mode Power Supplies (SMPS)

TYPES OF PRODUCTS				
Type	Primary nominal current r. m. s I_{PN} (A)	Primary current measuring range I_P (A)	Measuring resistance R_M (Ω) @ $T_A = 70^\circ C$	
BSX2-500ICV3HA	500	0~±1200	0~75	with ±15V@±500Amax
			0~10	with ±15V@±1000Amax
			0~100	with ±18V@±500Amax
			0~5	with ±18V@±1200Amax




Parameters Table

PARAMETERS	SYMBOL	UNIT	VALUE	CONDITIONS
Electrical data				
Supply voltage ($\pm 5\%$)	V_C	V	$\pm 15\sim 18$	
Current consumption	I_C	mA	20 ± 1	
Secondary nominal r.m.s. current	I_{SN}	mA	100	
Conversion ratio	K_N		1:5000	
R. m. s voltage for AC isolation test	V_d	KV	6	@50Hz, 1 min
Accuracy - Dynamic performance data				
Linearity	ε_L	%	$<\pm 0.1$	
Accuracy	X_G	%	$<\pm 0.5$	@ I_{PN} , $T_A = 25^\circ C$
Offset current	I_o	mA	$<\pm 0.1$	@ $I_p=0, T_A = 25^\circ C$
Thermal drift of I_o	I_{OT}	mA	$<\pm 0.3$	@ $I_p=0, -20^\circ C \sim +85^\circ C$
Response time	t_r	μs	<1	@ 90% of I_{PN} step
d_i/d_t accurately followed	d_i/d_t	$A/\mu s$	>100	
Frequency bandwidth ⁽¹⁾	f	kHz	DC~100	@-3dB
General data				
Ambient operating temperature	T_A	°C	-40 ~ +105	
Ambient storage temperature	T_S	°C	-40 ~ +125	
Secondary coil resistance	R_S	Ω	60	@ $T_A = 70^\circ C$
			70	@ $T_A = 125^\circ C$

Notes:

(1) Please refer to derating curves in the technical file to avoid excessive core heating at high frequency.

Dimensions BSX2-500ICV3HA (in mm. 1 mm = 0.0394 inch)

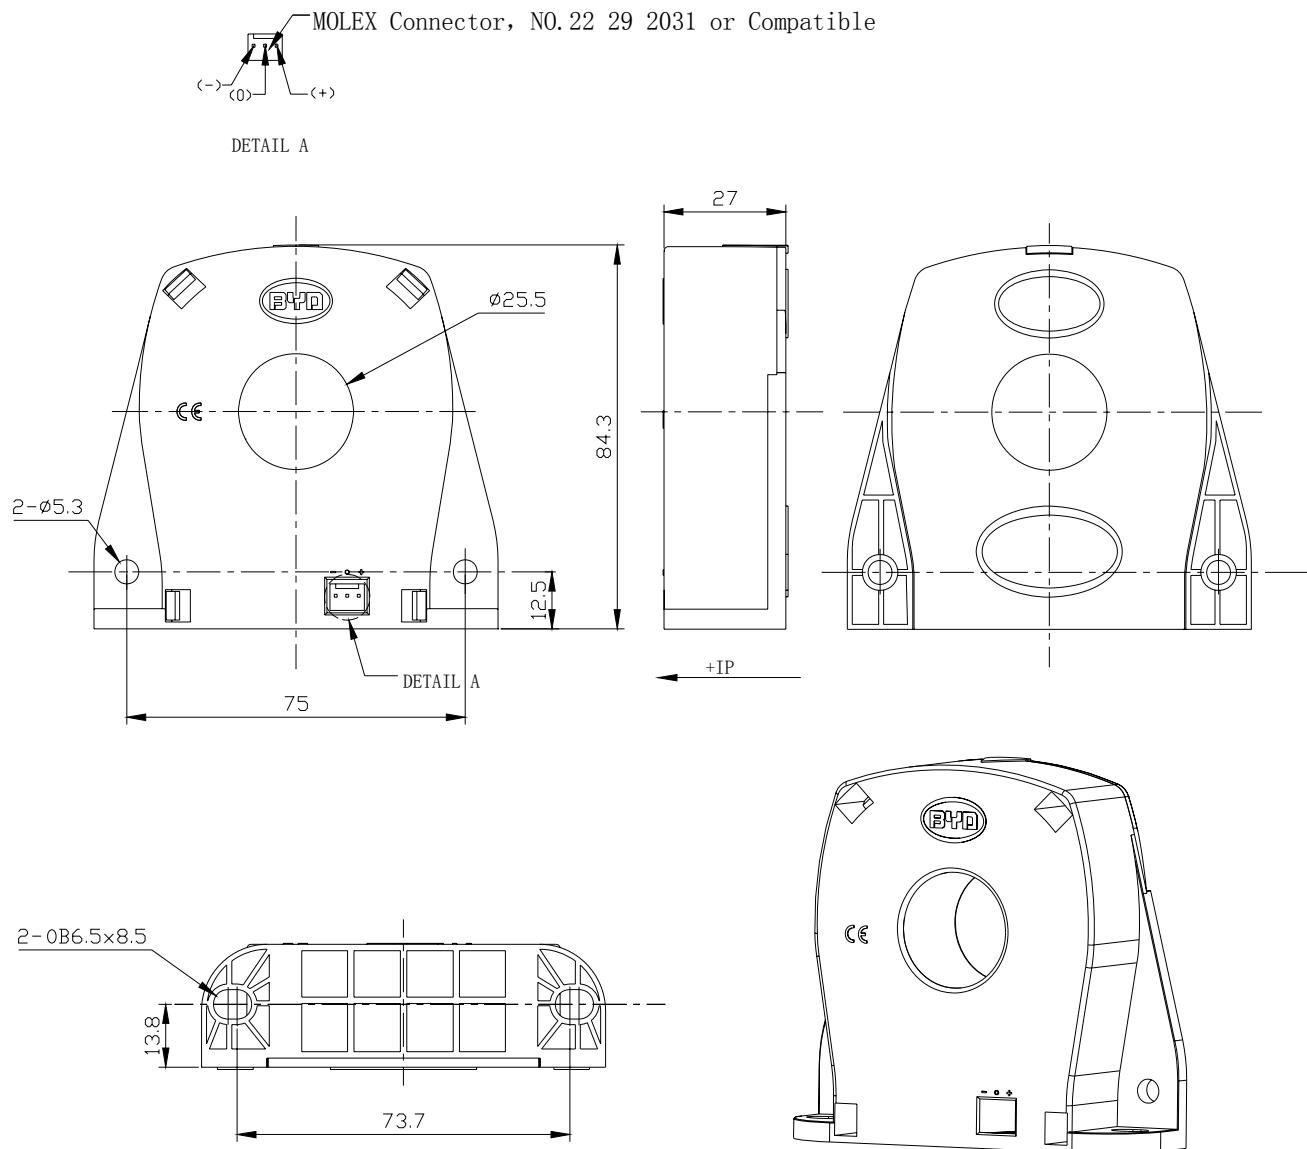

◆ Instructions of use

1. When the test current passes through the sensor, you can get the size of the output current. (Warning: wrong connection may lead to sensors damage)
2. According to user needs, different rated input currents and output currents of the sensors can be customized.

**RESTRICTIONS ON PRODUCT USE**

- The information contained herein is subject to change without notice.
- BYD Microelectronics Co., Ltd. (short for BME) exerts the greatest possible effort to ensure high quality and reliability. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing BME products, to comply with the standards of safety in making a safe design for the entire system, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue. In developing your designs, please ensure that BME products are used within specified operating ranges as set forth in the most recent BME products specifications.
- The BME products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These BME products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of BME products listed in this document shall be made at the customer's own risk.